



# Making Light Work Better

Designer and Manufacturer of Scientific Instruments Since 1985

[www.sciencetech-inc.com](http://www.sciencetech-inc.com)








Sciencetech strives to maintain our long-term commitment to research and development over a broad spectrum of industries and applications by designing and manufacturing solar simulators and optical spectroscopy instruments.



# Main Lines of Equipment



Research Grade  
Light Sources

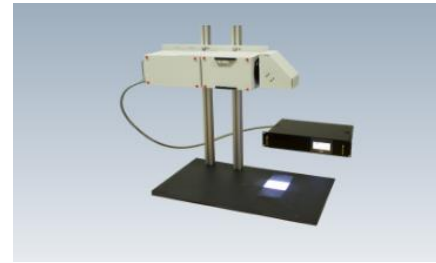


Solar Simulators



Large Area Solar  
Simulators




Quantum Efficiency  
Measurement

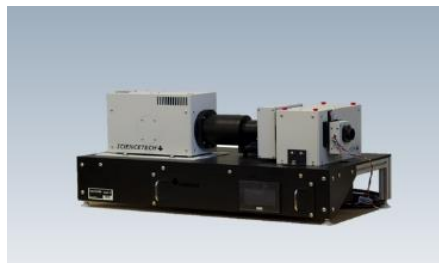

Tunable Light  
Sources



Monochromators

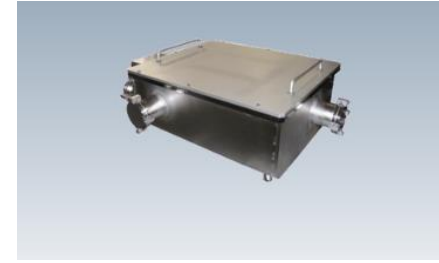

FTIR Spectroscopy



Custom Solutions



SCIENCETECH

# Research Grade Light Sources



# Research Grade Light Sources



## Xenon Arc Lamp

- Operational wattages : 75W – 6.5kW
- Collimated or focused beam output
- Broadband light emission from deep UV to IR



## Deuterium Lamps

- Operational wattages : 30W – 500W
- Collimated or focused beam output
- Ideal for high intensity deep UV emission



## QTH Lamps

- Wattages from 50W– 2000W
- Highly stable light output
- Ideal for applications in VIS and IR emission



SCIENCETECH




# Solar Simulators



# Solar Simulator Guidelines and principles

## Characteristics ‘simulated’ from a Solar Simulator

- 1) Spectral match
- 2) Spatial uniformity
- 3) Temporal stability
- 4) Power/Irradiance at the target of illumination
- 5) Collimation angle of the output beam

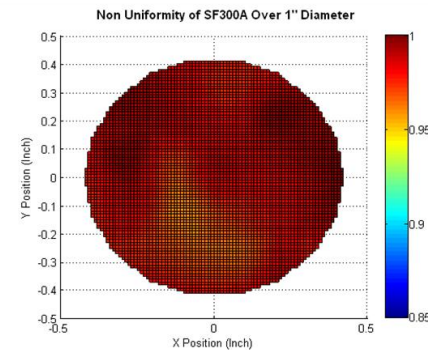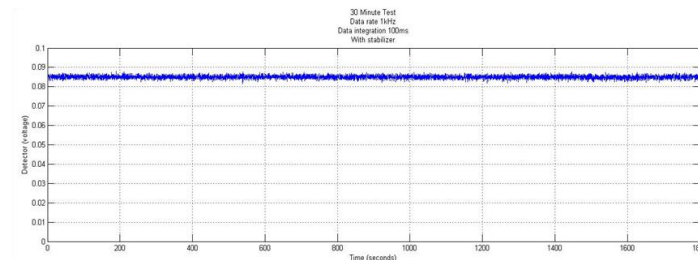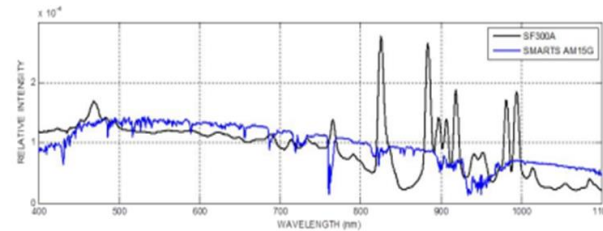

Watch our webinar for an overview of the guidelines and principles behind Solar Simulators.

Link: <https://youtu.be/YOf2N9gMum0>





# Main Standards for Solar Simulation

Sciencetech Solar Simulators reproduce the sun's irradiance according to:




- ASTM E927 - Specification for Solar Simulation for Photovoltaic Testing
- IEC 60904-9 - Solar Simulator performance requirements
- JIS C 8904-9:2017 - Solar cel Devices – Part – 9: Solar Simulator Performance Requirements
- IEC 61215 - Crystalline silicon terrestrial photovoltaic (PV) modules - Design qualification and type approval
- IEC 61646 - Thin-film terrestrial photovoltaic (PV) modules - Design qualification and type approval
- US Military Standard MIL-STD810 H\_Method 505.7 For Solar Radiation (Sunshine)
- DIN 75220 - Ageing of Automotive Components in Solar Simulation Units
- COLIPA/ ISO24443 and ISO24443 for dermatological, cosmetic and sunscreen testing





## Why use a solar simulator?

- Provides effective, repeatable and controllable outdoor conditions inside laboratories to test,
  - Performance of power plants
  - Develop new photovoltaic technologies
  - Research work conducted with solar energy
  - Material testing for weathering
  - Simulate extraterrestrial conditions

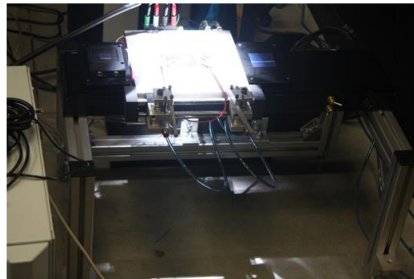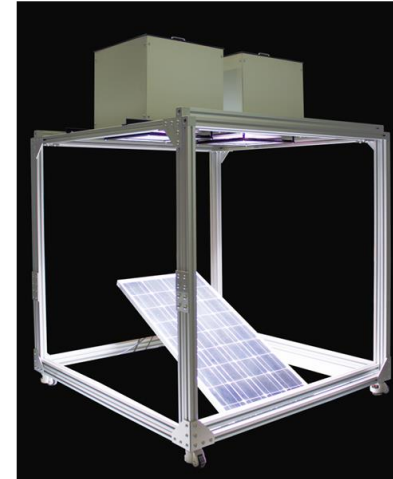

Sunscreen testing with a UV solar simulator



Watch our webinar on Applications of Solar Simulators Webinar

Link: <https://youtu.be/V-MTEfkFP9I>




# Small Area Solar Simulators



**SF-Series**

- Up to class AAA
- Target size up to 50 mm diameter
- High collimation

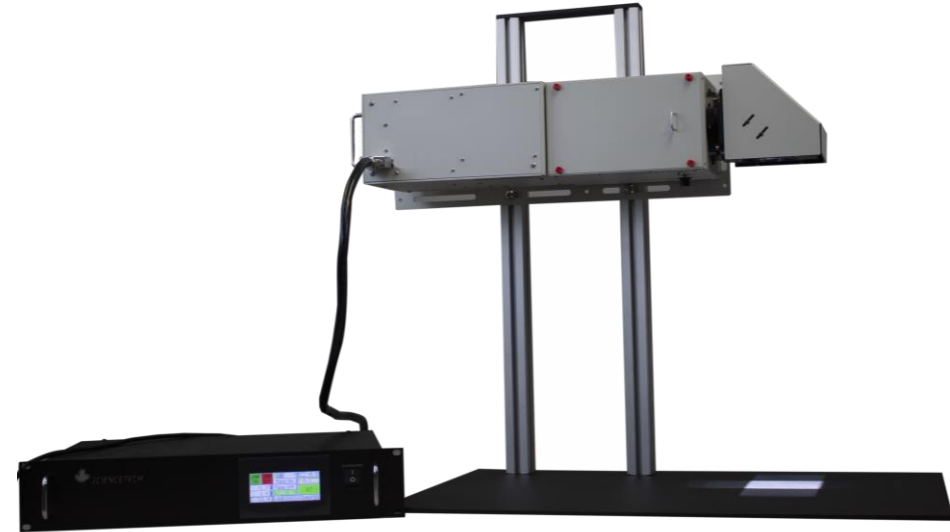


**SciSun Series**

- Class AAA
- Target size 50 mm × 50 mm
- Up to two sun irradiance

Available Air Mass filters include AM0, AM1.0, AM1.5G (more options available upon request)




# Medium Area Solar Simulators

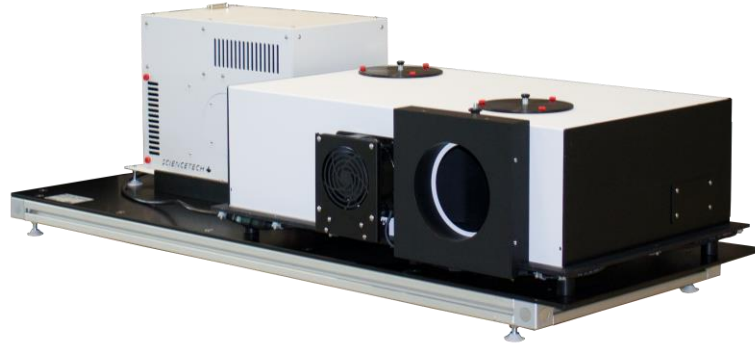

## Fully Reflective Solar Simulators

- Class AAA Solar Simulation
- Provides a well-collimated light output
- Ideal for applications requiring higher UV output
- No refractive optics and free of chromatic aberration

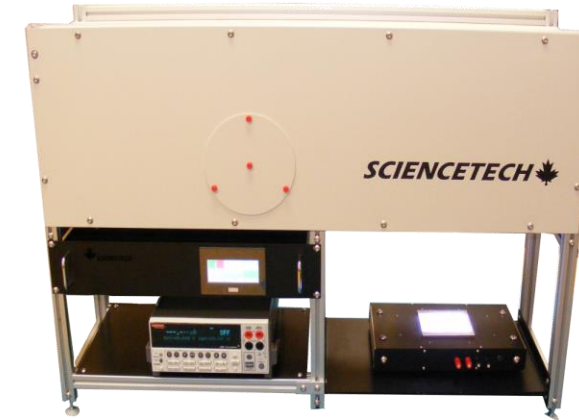

## Workstation Solar Simulators

- Class AAA Solar Simulation
- Target size up to 60 mm × 60 mm
- Provides up to two sun irradiance
- Comes with a workstation ideal for PV cell testing.



## Ultra High Efficiency (UHE)



- Class AAA Solar Simulation
- High electrical to optical power conversion efficiency
- Environmentally friendly operation.
- Target size up to 30 cm × 30 cm



Watch our product demonstration video for ultra high efficiency solar simulator (UHE-NL-150) with I-V testing equipment

Link: <https://youtu.be/A0oS70Dn5sQ>






# Large Area Solar Simulators

## Large Area Xe or MH Solar Simulators



- Variable illumination areas up to 5mx5m
- Class AAA solar simulation
- AM0, AM1.5G or other specialty spectral matches
- Various degrees of collimation, depending on customer requirements

## LED Solar Simulator

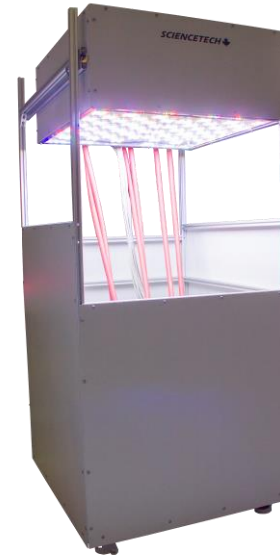

- Customizable large LED solar simulators available upon request
- Spectrally adjustable, ideal for multi-junction PV testing
- Stepwise / continuous irradiance attenuations



# Highly Collimated Solar Simulators



- Highly collimated, 0.7 ° collimation half angle
- AM0, AM1.5G or other specialty spectral matches
- Up to class ABA
- Target size up to 30 cm diameter
- Fresnel lenses are used as optics to provide highly collimated light output



Solar Simulator. Highly Collimated Solar Simulators  
Link: [https://youtu.be/BsR\\_j12i4sw](https://youtu.be/BsR_j12i4sw)



# Fiber Optic Output Solar Simulators

## Lightline Solar Simulators



- Fiber optic output for flexible illumination
- Up to class AAA solar simulation
- Up to 50mm × 50mm
- Up to 9 suns irradiance on target plane
- Collimated or focused beam outputs available
- AM1.0D, AM1.5G, AM1.5D, AM2.0 and other specialty spectral filters available
- Integrate with glove boxes, vacuum chambers & other specialty sample chambers



# Flash Solar Simulators



Large Area Flash  
Solar Simulators

- Class AAA
- Target Size: up to 2 m × 2 m
- Uses a heavy duty xenon flash lamp
- Pulse duration: 0.5 – 2.5 ms



Concentrated Flash  
Solar Simulators

- Class AAA
- Target size: 5 cm × 5 cm
- High Flux, up to 4000 suns





SCIENCETECH

# Characterization of Solar Cells



# IV Measurement System

## Highly Collimated Solar Simulators

The SSIVT is a complete electrical current-voltage (I-V) measurement system used to characterize photovoltaic cell performance. The I-V Measurement System includes:


- Keithley 2400 series SMU
- Sciencetech SciPV:IV Software for Windows
- RS232 to USB dongle
- SCI BI 100 load boost module (Model SSIVT-2KC)

## Standards

- IEC 60891. Assessment - Photovoltaic devices – Procedures for temperature and irradiance corrections to measured I-V characteristics
- ASTM E948. Standard Test Method for Electrical Performance of Photovoltaic Cells Using Reference Cells Under Simulated Sunlight.



# Quantum Efficiency Measurement

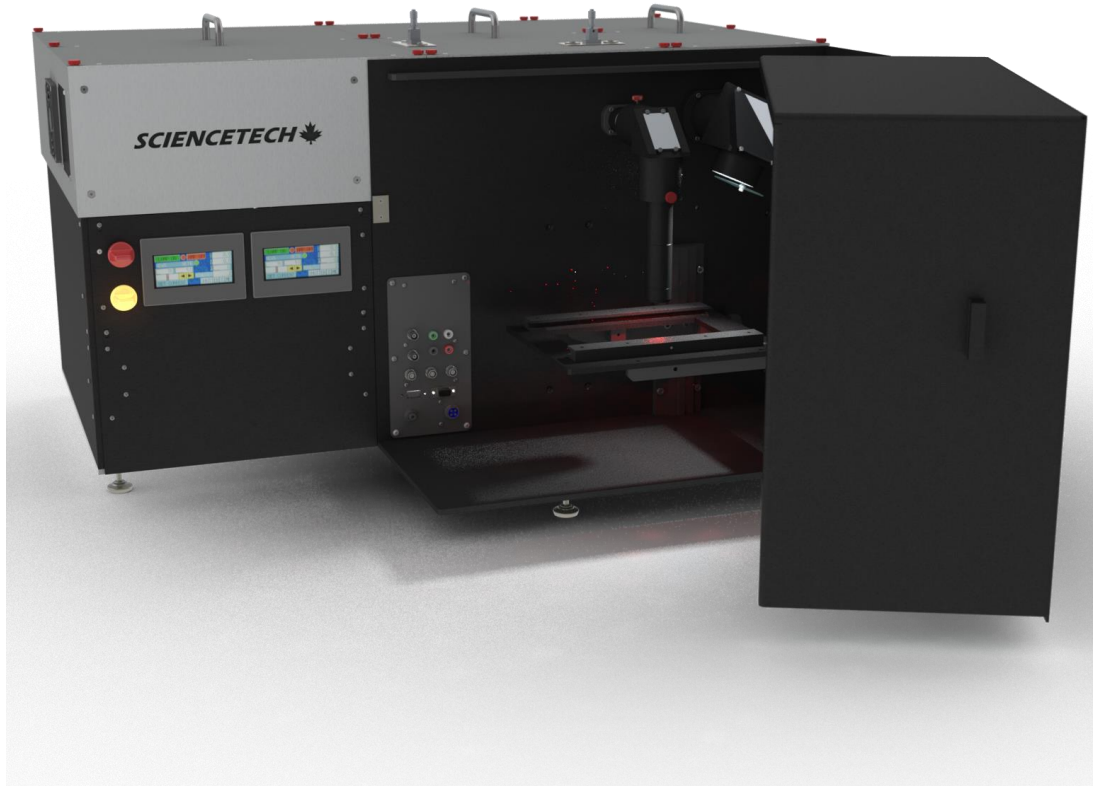

- Spectral Response : 250 - 2500 nm
- IV Measurements
- Internal and External Quantum Efficiency
- Reflectance and transmittance measurements
- Induced Voltage (IV) :  $V_{OC}$  ,  $I_{SC}$ ,  $R_{shunt}$ ,  $P_{max}$ , efficiency %, and fill factor
- Monochromatic light power up to 125 mW
- Bias light : class AAA solar simulator included
- Keithley 2400 series source meter
- Stanford SR800 series lock-in amplifier
- Designed for compliance with ASTM E1021, ASTM E948, IEC 60904-8, IEC 60904-1
- AC/DC Mode




SCIENCETECH

# Optical Spectroscopy Systems





# Tunable Light Sources

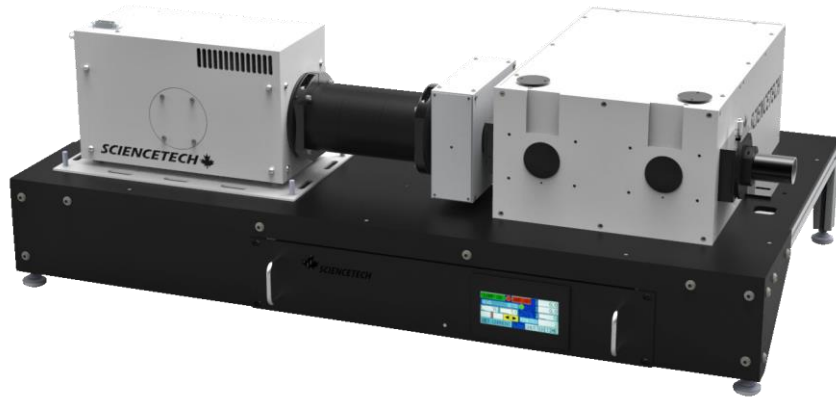

- Produces monochromatic light from 300 nm to 1800 nm.
- Optical resolution from 20 nm to 0.2 nm.
- Collimated light output is standard.
- Condensed or coupled output light can be provided.
- Sciencetech's software, Sci-Spec, controls all components of the system



Product Demonstration video

Link: [https://youtu.be/JawQmMEc\\_m4](https://youtu.be/JawQmMEc_m4)



Double additive/subtractive and triple monochromators are available!



	9030	9072	9010	9055	9057	9040	9490	9150
Focal Length (mm)	100	125	200	250	457	550	1000	1500
F/#	3.2	3.5	3.5	3.5	8	6.9	13	12
Grating Size*	S (32 × 32)	T (30 × 30)	D (50 × 50)	T (50 × 50)	T (50 × 50)	T (64 × 64)	T (64 × 64)	S (110 × 110)
Resolution (nm) **	1	0.4	0.4	0.2	0.2	0.03	0.017	0.013


\*S for single, D for double, T for triple, grating size mm × mm

\*\* Available for gratings with 1200l/mm



# Far Infrared Fourier-Transform Spectrometer

## SPS-300

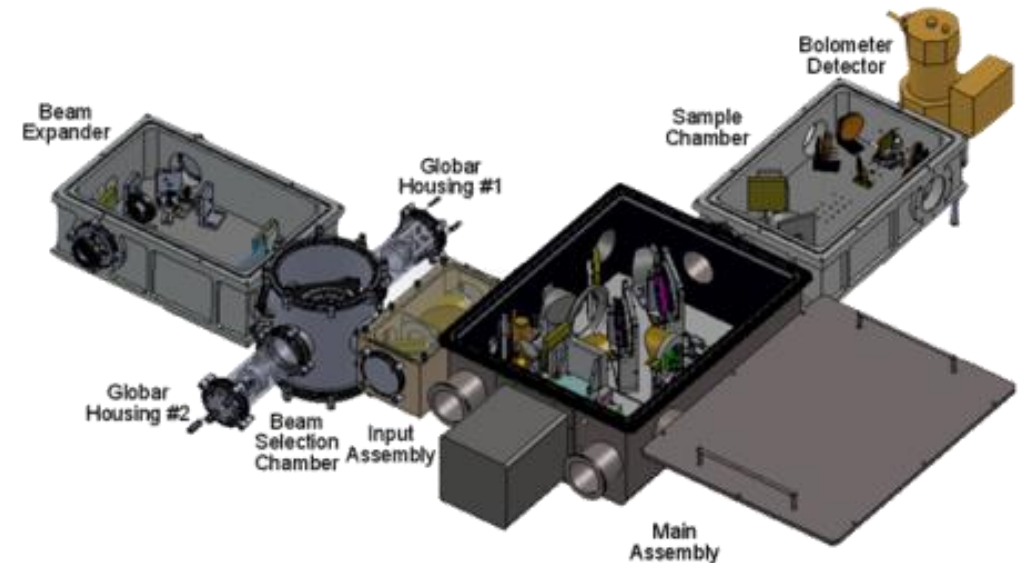


- Modified Michelson (Martin-Puplett) interferometer, vacuum compatible, helium-cooled bolometer
- Operates in the far infrared or THz spectral region (from 5  $\mu\text{m}$  to 5000  $\mu\text{m}$ , 0.06 to 60 THz or 2  $\text{cm}^{-1}$  to 2000  $\text{cm}^{-1}$  )



# Far Infrared Fourier-Transform Spectrometer

ESA used Sciencetech's SPS-200\* to calibrate the detectors for its Planck satellite, allowing the telescopes to analyze the infrared radiation remaining from the Big Bang

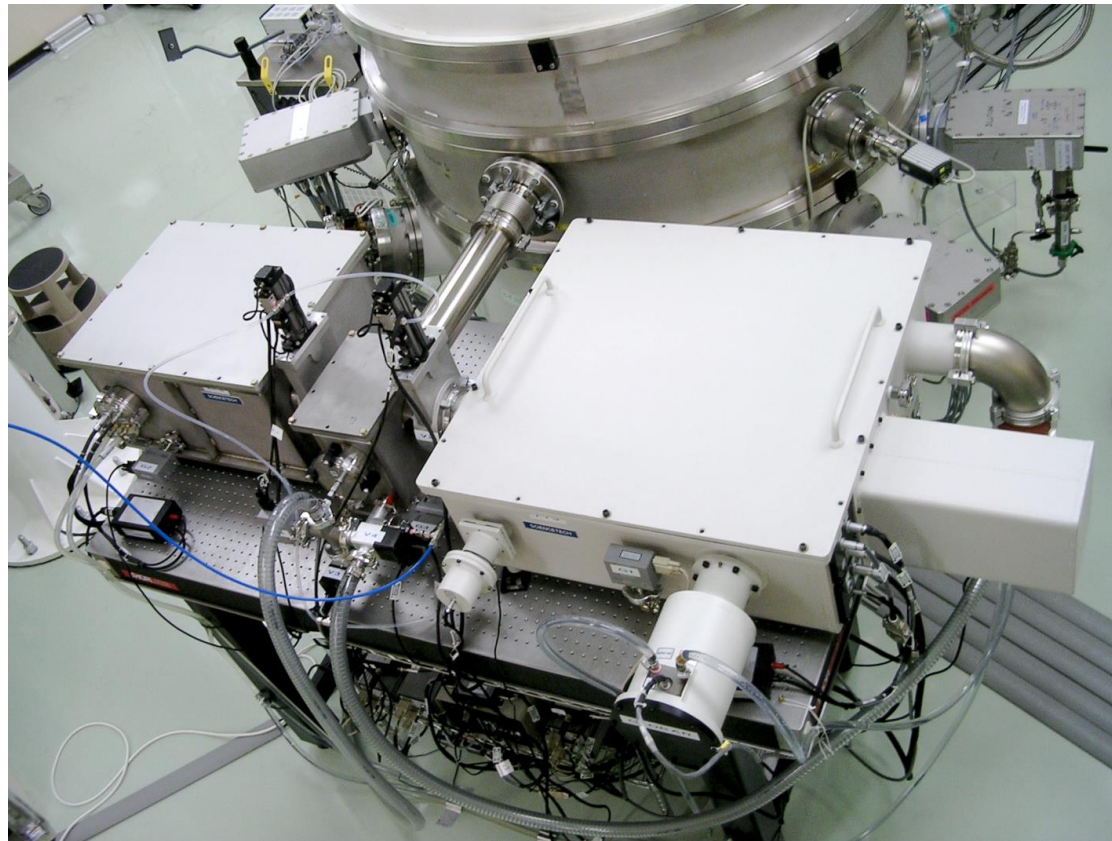

\*SPS-200 is a precursor to the Sciencetech's current SPS-300



SCIENCETECH

# Custom Solutions





Sciencetech offers custom solutions for your research or industrial needs



Photovoltaic Testing  
for solar cell  
performance




Space Environment  
Simulation



Material Testing for  
automotive industry



Solar Thermal  
power plant testing

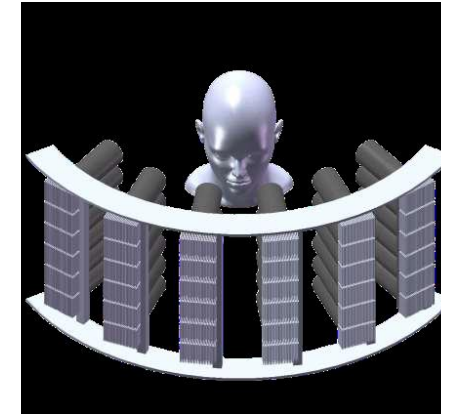


Dermatology and  
sunscreen testing





**Custom solar simulators, speciality light sources and spectroscopy systems**




# Spot-Focused Image Furnace for Ultra-High Temperature Oxidation Studies

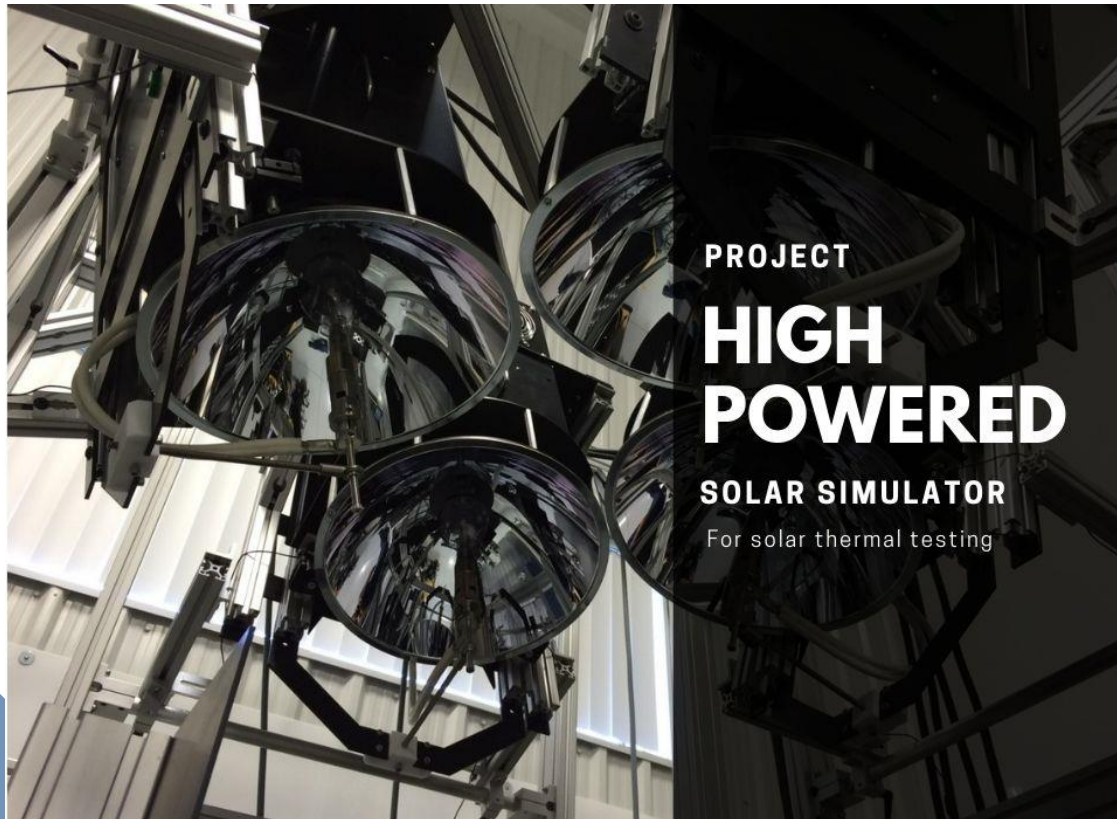

Screw melts in 30 seconds with only 20% power



- Four 6.5 kW Xenon Arc Lamps
- Target size 5 cm diameter
- More than 10 kW optical power at target plane
- More than 5,000 suns

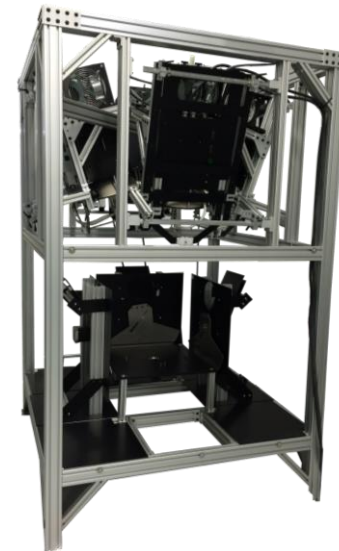



# High Depth of Field IR Solar Simulator

PROJECT

## LARGE AREA IR

SOLAR SIMULATOR

With high spatial uniformity.

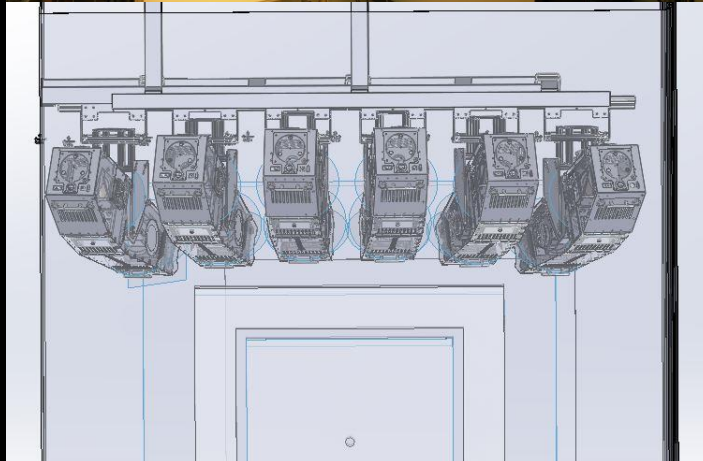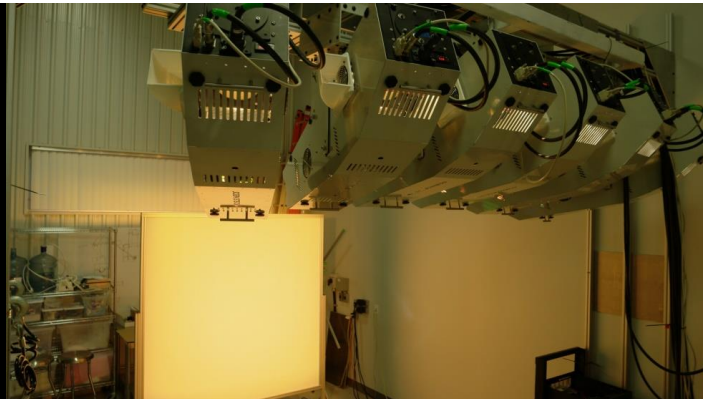

- Target Area 1m × 1m :  $\pm 5\%$  Non-uniformity.
- Target Area 1.5m × 1.5m :  $\pm 30\%$  Non-uniformity.
- Spectral match : ASTM Class A in 700 nm – 1000 nm.
- Power and uniformity maintained over 30 cm depth.
- Application: 3D camera testing.






# Highly-Collimated Solar Simulator for Space-Related Research

## PROJECT


# HIGHLY COLLIMATED

## SOLAR SIMULATOR

With automated beam angle movement.  
Developed for a prominent national  
space agency.

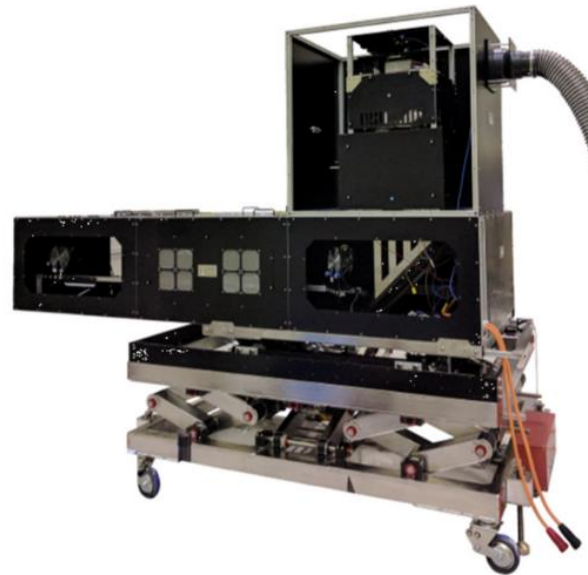

- Class AAA
- Highly collimated output :  $0.35^\circ$  half angle collimation
- AM0 spectral match
- 5-axis automated movement
- Continuous attenuation from 0.01-1 sun
- ISO7 cleanroom compliance

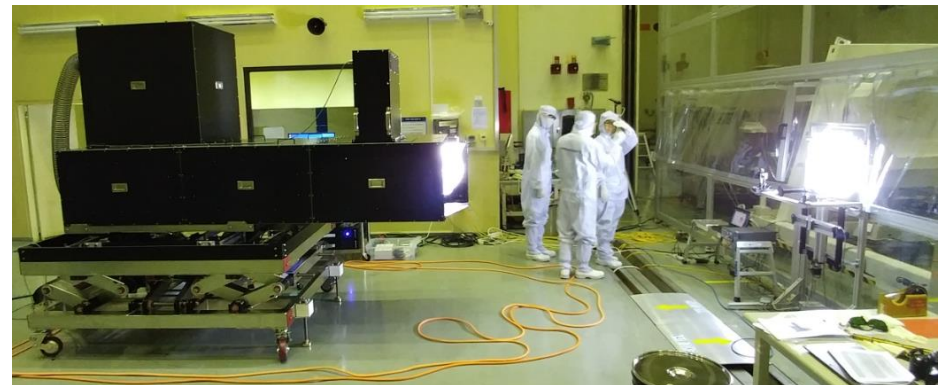

# UV Solar Simulator for Air-pollution Studies in the Upper Atmosphere



## PROJECT

# UPPER ATMOSPHERE SOLAR SIMULATOR


For photochemistry in air pollution studies. Produces solar spectrum found in the upper atmosphere

- Illuminates a rotating cylindrical drum designed to hold aerosols in suspension.
- 0.5 m<sup>2</sup> target area
- Collimation of 1° half angle.
- AMO spectral match
- Variable attenuation from 0.25- 1 sun.
- The system was designed to fit within a room of dimensions 3m x 5m x 2.5m
- Constant temperature regulation of the system to maintain at 25 ° C





# Large Area QTH Solar Simulator

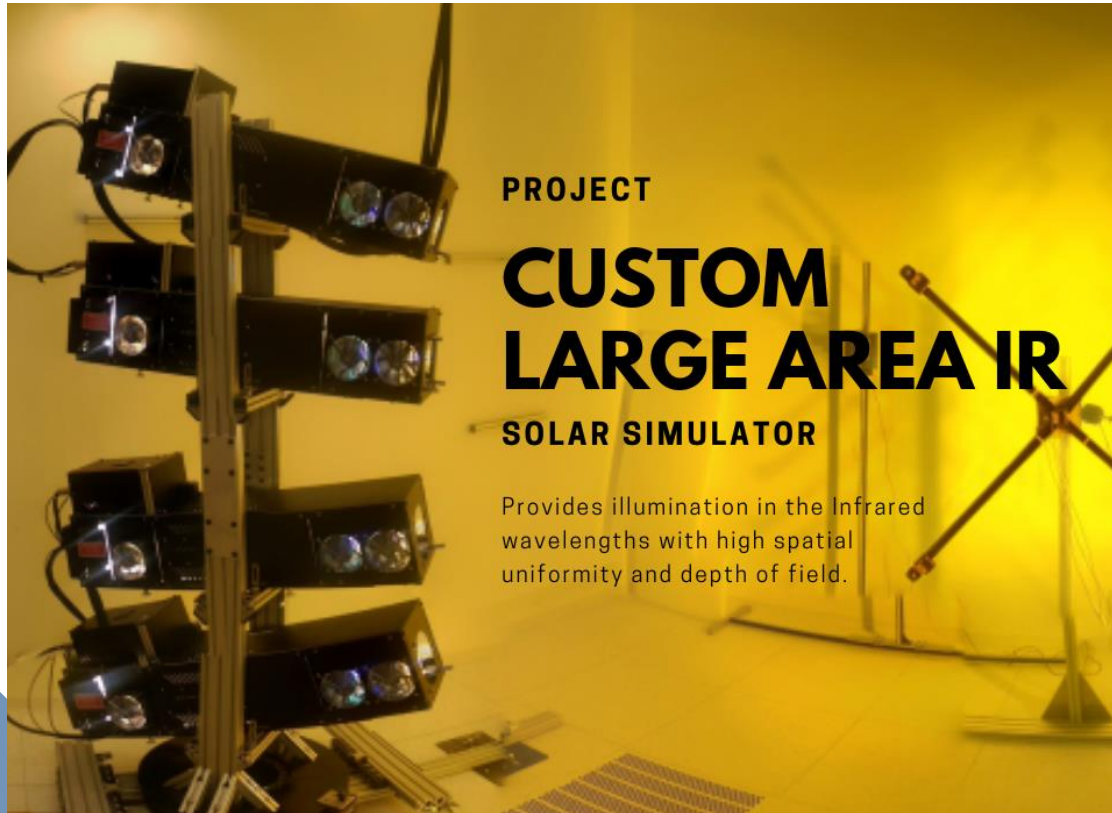

- Solar Simulator consisted of Eight 2kW QTH sources
- Target area : 1.5m x 1.5m
- Wavelength range : 700-1100 nm (AM1.5G, 1 sun irradiance)
- Temporal Instability :  $\pm 5\%$ .
- Irradiance attenuation adjustable between 0.1-1 sun





Thank you and do contact us for your future optical spectroscopy and solar simulator needs!



[www.sciencetech-inc.com](http://www.sciencetech-inc.com)

[sales@sciencetech-inc.com](mailto:sales@sciencetech-inc.com) | +1 (519) 644-0135 | 1450 Global Drive, London, ON N6N 1R3 Canada